
MARKING: T4
SOD-323
特征 Features
SOD-323 贴片塑封二极管

- 开关速度小于 4.0nS; Fast Switching Device ($TRR < 4.0 \text{ nS}$)
- 最大功率耗散 200mW; Power Dissipation of 200mW
- 高稳定性和可靠性。High Stability and High Reliability
- 反向漏电流小。Low reverse leakage

机械数据 Mechanical Data

- 封装: SOD-323 封装 SOD-323 Small Outline Plastic Package
- 极性: 色环端为负极Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性($TA = 25^\circ\text{C}$ 除非另有规定)





Maximum Ratings & Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)

参数 Parameters	符号 Symbol	数值 Value	单位 Unit
反向电压 Reverse Voltage	V_R	75	V
反向峰值电压 Peak Reverse Voltage	V_{RM}	100	V
功率消耗 Power Dissipation	P_d	200	mW
工作结温 Operating junction temperature	T_j	125	°C
存储温度 Storage temperature range	T_s	-55~+150	°C
热阻 Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	625	°C/W
反向工作电压 Working Inverse Voltage	V_{IV}	75	V
平均整流电流 Average Rectified Current	I_o	150	mA
正向(不重复)电流 Non-repetitive Peak Forward Current	I_{FM}	300	mA
正向(不重复)浪涌电流 Peak Forward Surge Current @ $t_p=1\mu\text{s}$; $TA=25^\circ\text{C}$	I_{FSM}	2.0	A

Valid provided that electrodes are kept at ambient temperature.

电特性 Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified).


符号 Symbols	参数 Parameter	测试条件 Test Condition	界限 Limits		单位 Unit
			Min	Max	
BV	反向击穿电压	$IR=100\mu\text{A}$	100	75	V
	Breakdown Voltage	$IR=5\mu\text{A}$	75		
IR	反向漏电电流	$VR=20\text{V}$	---	25	nA
	Reverse Leakage Current	$VR=75$	---	1	uA
VF	正向电压	$IF=1.0\text{mA}$	---	0.715	V
	Forward Voltage	$IF=10\text{mA}$	---	0.855	
		$IF=50\text{mA}$	---	1.00	
		$IF=150\text{mA}$	---	1.25	
TRR	反向恢复时间	$IF= IR=10\text{mA}$	---	4	nS
	Reverse Recovery Time	$RL=100\Omega$			
		$IRR=0.1 \times IR$			
CT	结电容	$VR=0\text{V}, f=1\text{MHz}$	---	2	pF
	Capacitance				

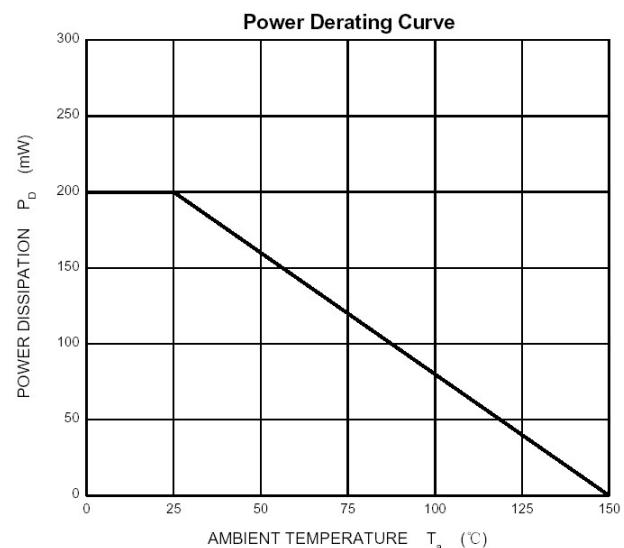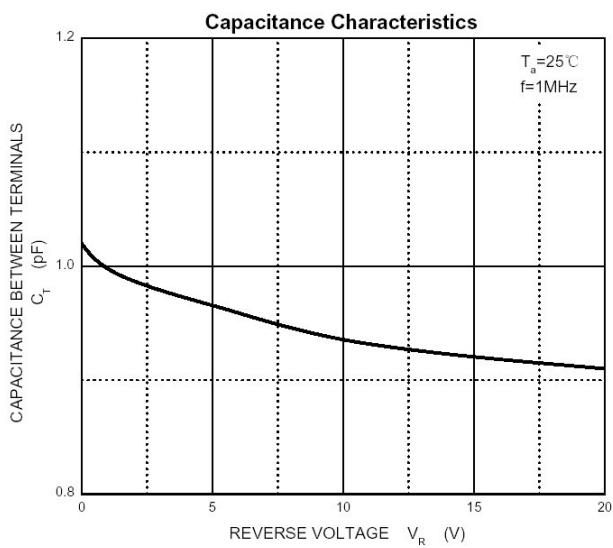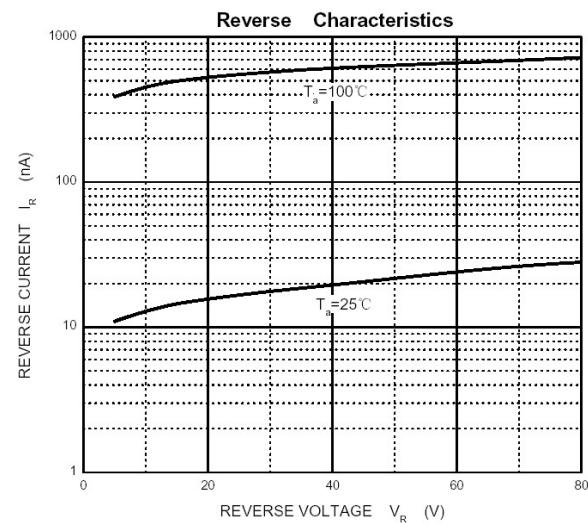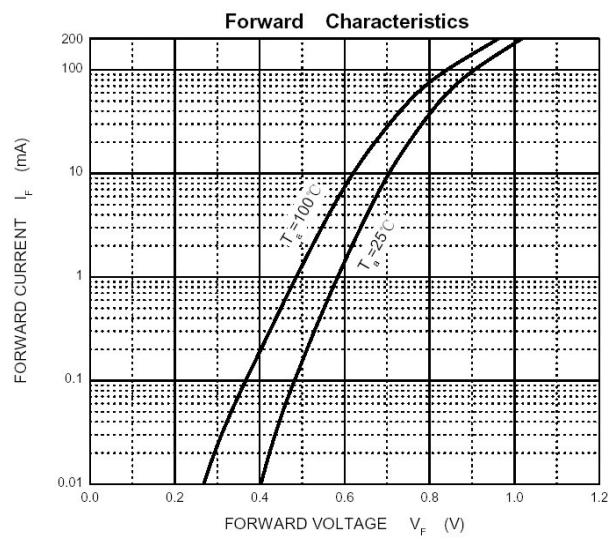

SOD-323 PACKAGE OUTLINE


Plastic surface mounted package

SOD-323

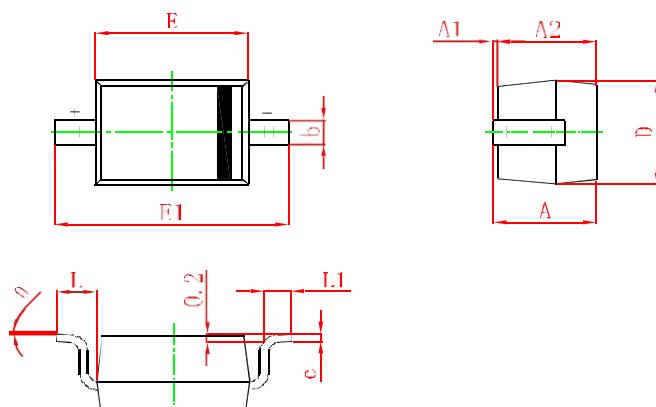

Symbol	Min.(mm)	Max.(mm)
A		1.000
A1	0.000	0.100
A2	0.800	0.900
b	0.250	0.350
c	0.080	0.150
D	1.200	1.400
E	1.600	1.800
E1	2.500	2.700
L	0.475REF	
L1	0.250	0.400
θ	0°	8°

SOD-323 Suggested Pad Layout

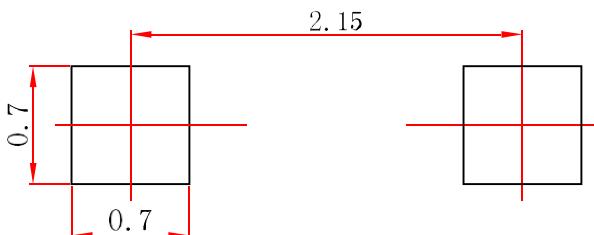

Note:

1. Controlling dimension:in millimeters.
2. General tolerance: ± 0.05 mm.
3. The pad layout is for reference purposes only.