
Digital Transistors (Built-in Resistors)

DTC143ZM/DTC143ZE/DTC143ZUA
DTC143ZKA /DTC143ZCA

DIGITAL TRANSISTOR (NPN)

• **Equivalent Circuit**

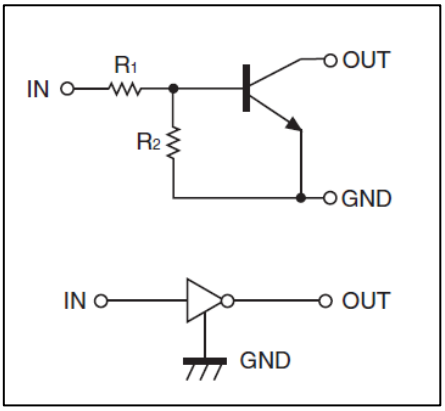


FEATURES

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input.They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy


PIN CONNENCTIONS and MARKING

DTC143ZM — **SOT-723**




1. IN
2. GND
3. OUT

DTC143ZE — **SOT-523**




1. IN
2. GND
3. OUT

DTC143ZUA — **SOT-323**




1. IN
2. GND
3. OUT

DTC143ZKA — **SOT-23-3L**



1. IN
2. GND
3. OUT

DTC143ZCA — **SOT-23**



1.IN
2.GND
3.OUT

ORDERING INFORMATION

Part Number	MARKING (1)	Package	Packing Method	Pack Quantity
DTC143ZM	**E23**	SOT-723	Reel	8000pcs/Reel
DTC143ZE	**E23**	SOT-523	Reel	3000pcs/Reel
DTC143ZUA	**E23**	SOT-323	Reel	3000pcs/Reel
DTC143ZKA	**E23**	SOT-23-3L	Reel	3000pcs/Reel
DTC143ZCA	**E23**	SOT-23	Reel	3000pcs/Reel

Notes: (1). Solid dot = Green molding compound device, if none, the normal device.
(2). XXX=Code

MAXIMUM RATINGS(Ta=25℃ unless otherwise noted)


Symbol	Parameter	Limits(DTC143Z□)						Unit
		M	E	UA	CA	KA	SA	
V_{CC}	Supply Voltage	50						V
V_{IN}	Input Voltage	-5～+30						V
I_O	Output Current	100						mA
P_D	Power Dissipation	100	150	200	200	200	300	mW
T_J,T_{stg}	Operation Junction and Storage Temperature Range	-55～+150						℃

ELECTRICAL CHARACTERISTICS (Ta=25℃ unless otherwise specified)


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage	$V_{I(off)}$	V_{CC}=5V,I_O=100μA	0.5			V
	$V_{I(on)}$	V_O=0.3V ,I_O=5mA			1.3	V
Output voltage	$V_{O(on)}$	I_O/I_I=5mA/0.25mA		0.1	0.3	V
Input current	I_I	V_I=5V			1.8	mA
Output current	$I_{O(off)}$	V_{CC}=50V,V_I=0			0.5	μA
DC current gain	G_I	V_O=5V,I_O=10mA	80			
Input resistance	R_1		3.29	4.7	6.11	kΩ
Resistance ratio	R_2/R_1		8	10	12	
Transition frequency	f_T	V_O=10V ,I_O=5mA,f=100MHz		250		MHz

Typical Characteristics


ON Characteristics

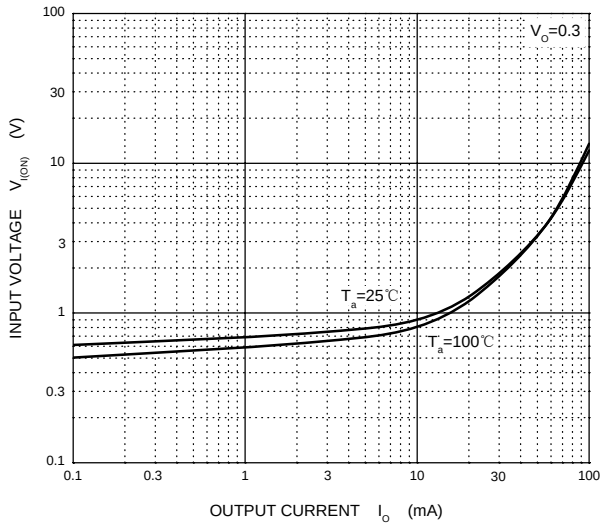


OFF Characteristics

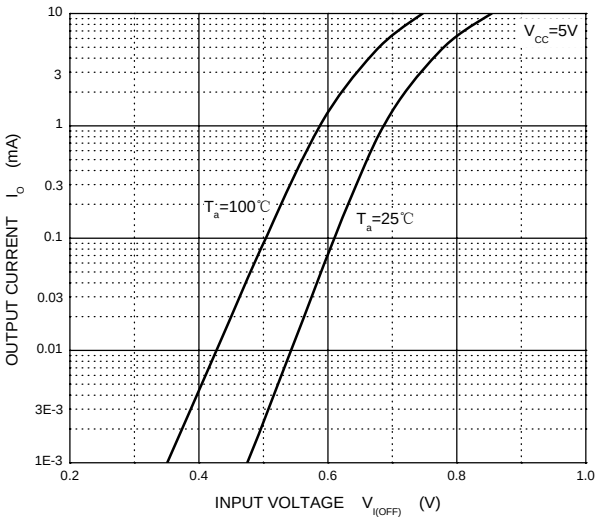


G_I —— I_O

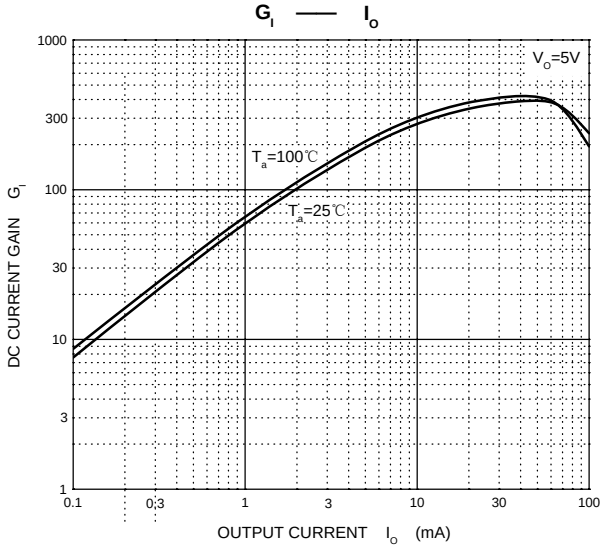


$V_{O(ON)}$ —— I_O

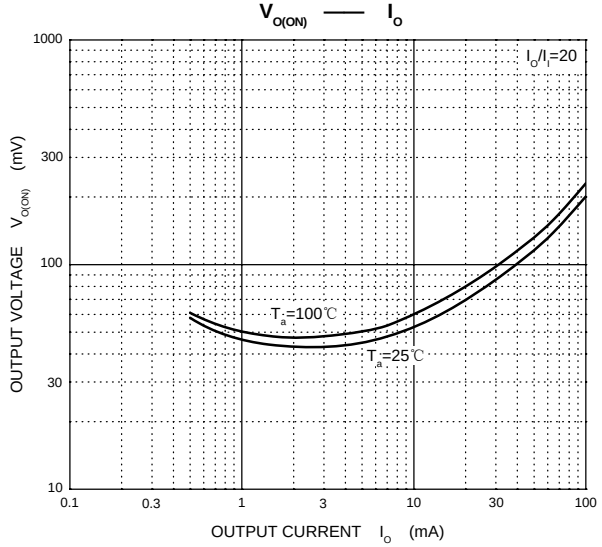


C_O —— V_R

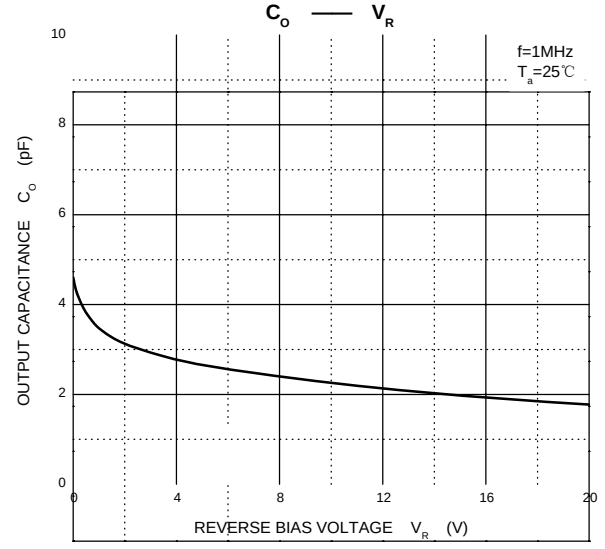



P_D —— T_a

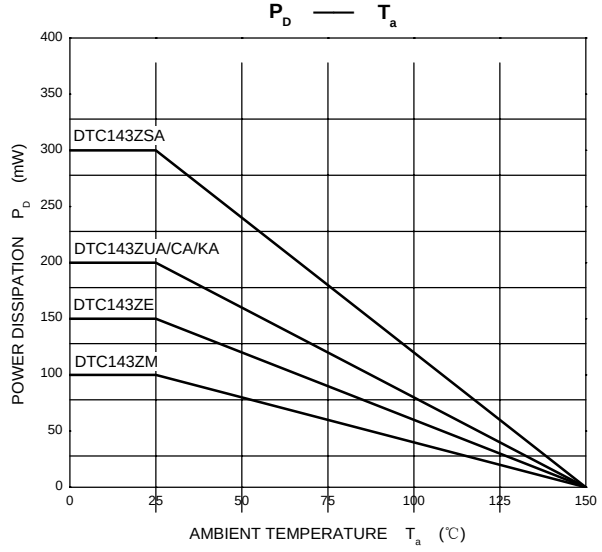

SOT-523 Package Outline Dimensions

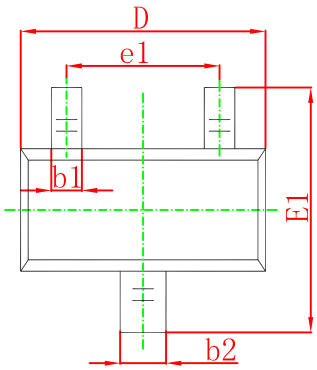


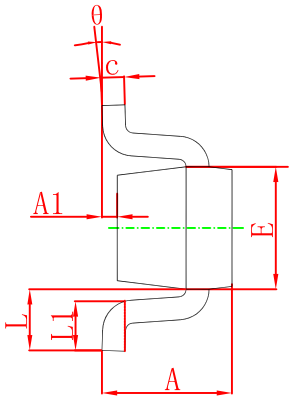




Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500 TYP.		0.020 TYP.	
e1	0.900	1.100	0.035	0.043
L	0.400 REF.		0.016 REF.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

SOT-523 Suggested Pad Layout




Note:
1.Controlling dimension:in millimeters.
2.General tolerance:±0.05mm.
3.The pad layout is for reference purposes only.

SOT-323 Package Outline Dimensions

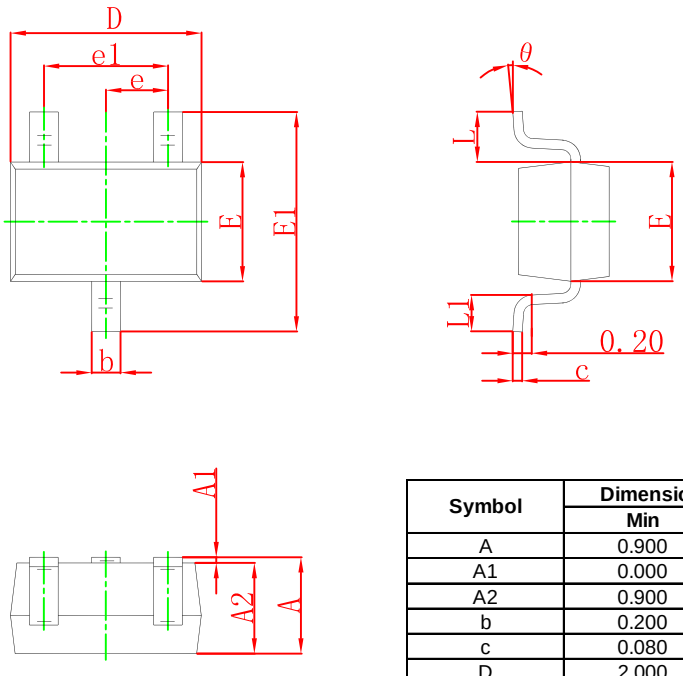


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650 TYP		0.026 TYP	
e1	1.200	1.400	0.047	0.055
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

SOT-323 Suggested Pad Layout

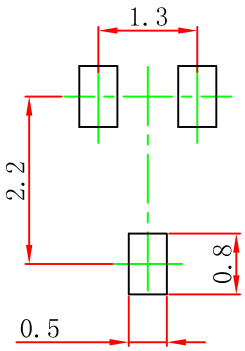


Note:
1.Controlling dimension:in millimeters.
2.General tolerance:±0.05mm.
3.The pad layout is for reference purposes only.

SOT-23 Package Outline Dimensions

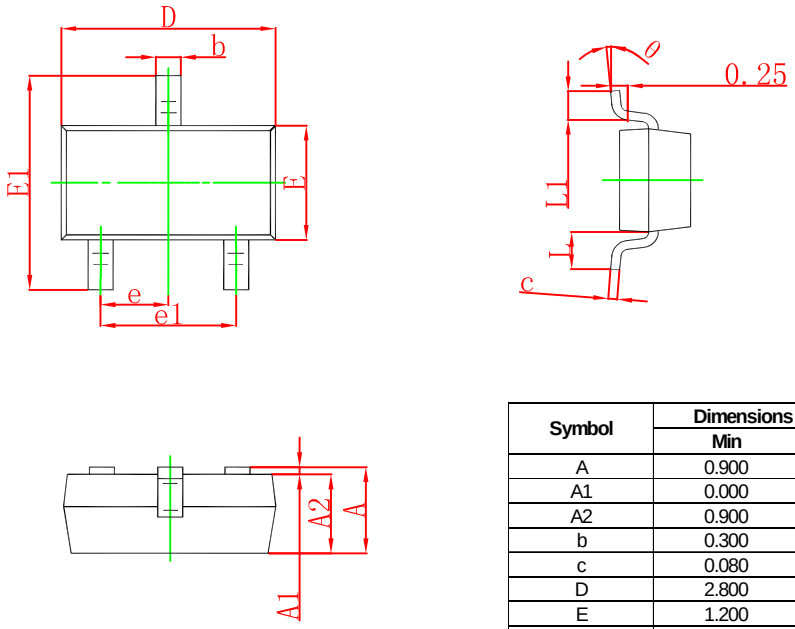

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Suggested Pad Layout



Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.